



# Black and Decker JE2200B Saftey Locking Latches Replacement

This guide will help users replace old or broken safety locking latches. These latches hold various juicer pieces in place.

Written By: AvaAnne Hogue



## INTRODUCTION

The safety latches are an easy component of the juicer to replace. They require minimal tear down to replace and have no safety hazards associated with replacement.

---




### TOOLS:

- [iFixit Opening Tools](#) (1)
-




## Step 1 — Saftey Locking Latches

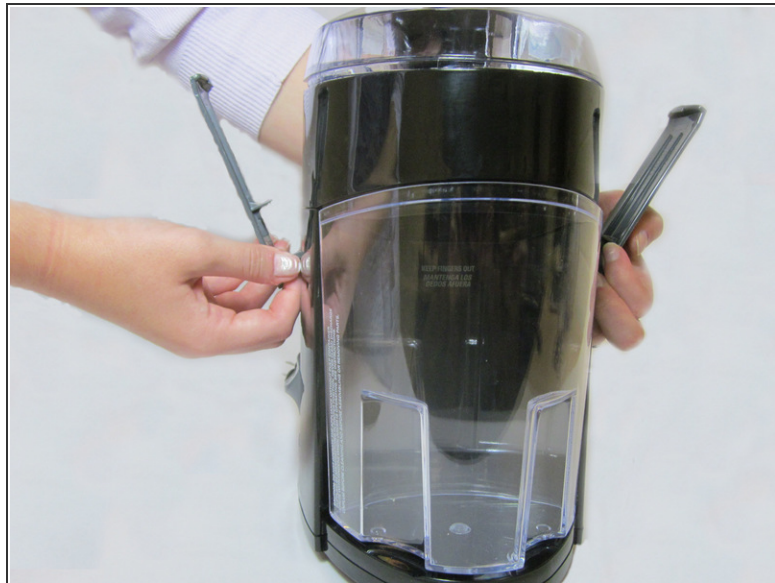

- Unlock the latches on the juicer by places hands under latches and pulling out.

## Step 2

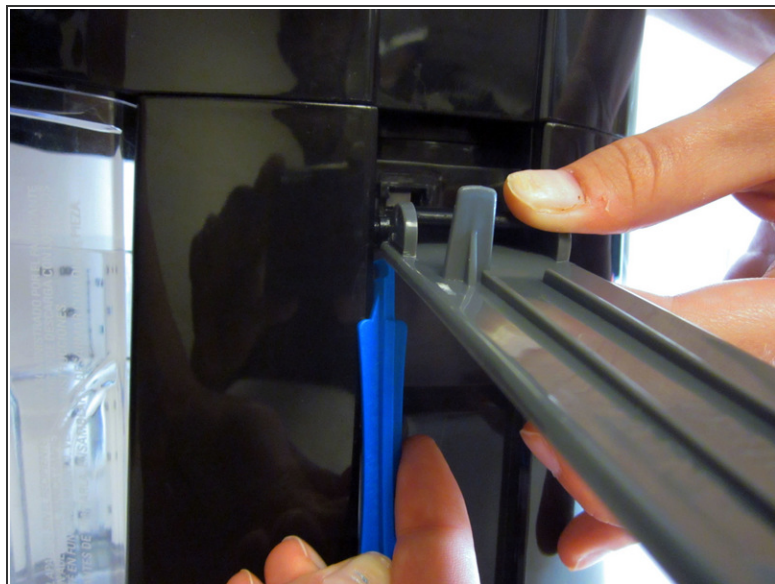


- Grasp the latch close to the juicer with your right thumb and pointer finger and pull to the right.
- With your other hand, take the plastic opening tool and insert it on the bottom of the latch.

## Step 3



- Push the tool up to remove the latch.
- Repeat Step 2 for the second safety locking latch.

 **Use gentle force to remove the latches from the juicer to avoid damage to the machine.**

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-27 03:02:24 PM.